

INSTRUCTION MANUAL FOR CABINET MRL

DESCRIPTION

The cabinets for MRL units have the following features:

- Two door cabinet in RAL 7032 painted steel doors with intermediate stop anti involuntary closing.
- Key lock. The door is fitted with a key lock which allows reclosing and re-clamping keyless.
- Eyebolt for internal handling of loads customizable in two positions.
- Accessories, fasteners and assembly diagram.
- Openings customizable.
- Openings for ventilation.
- Designed for installing a lighting fluorescent.
- Possibility to insert the inside bar in two positions.
- Cables for earthing
- Doors with stop at 90° and 180°

On request:


- Customized colors.
- Stainless steel plate.
- Custom size

TECHNICAL DATA

	1- Aperture customizable. To remove the opening, apply slight pressure.
	2- Openings for ventilation.
	Fold the flaps present

MRL CABINETS FOR OMAR LIFT CONTROL UNIT				
	TANK	A (mm)	B (mm)	H (mm)
MINI	40 - 50/S - 60/S	350	700	1550
MEDIUM	110/S - 135/S	400	900	2100
LARGE	210/S - 320/S	580	1120	2100
X-LARGE	450 - 680	1250	1900	2200

EXPLODED VIEW

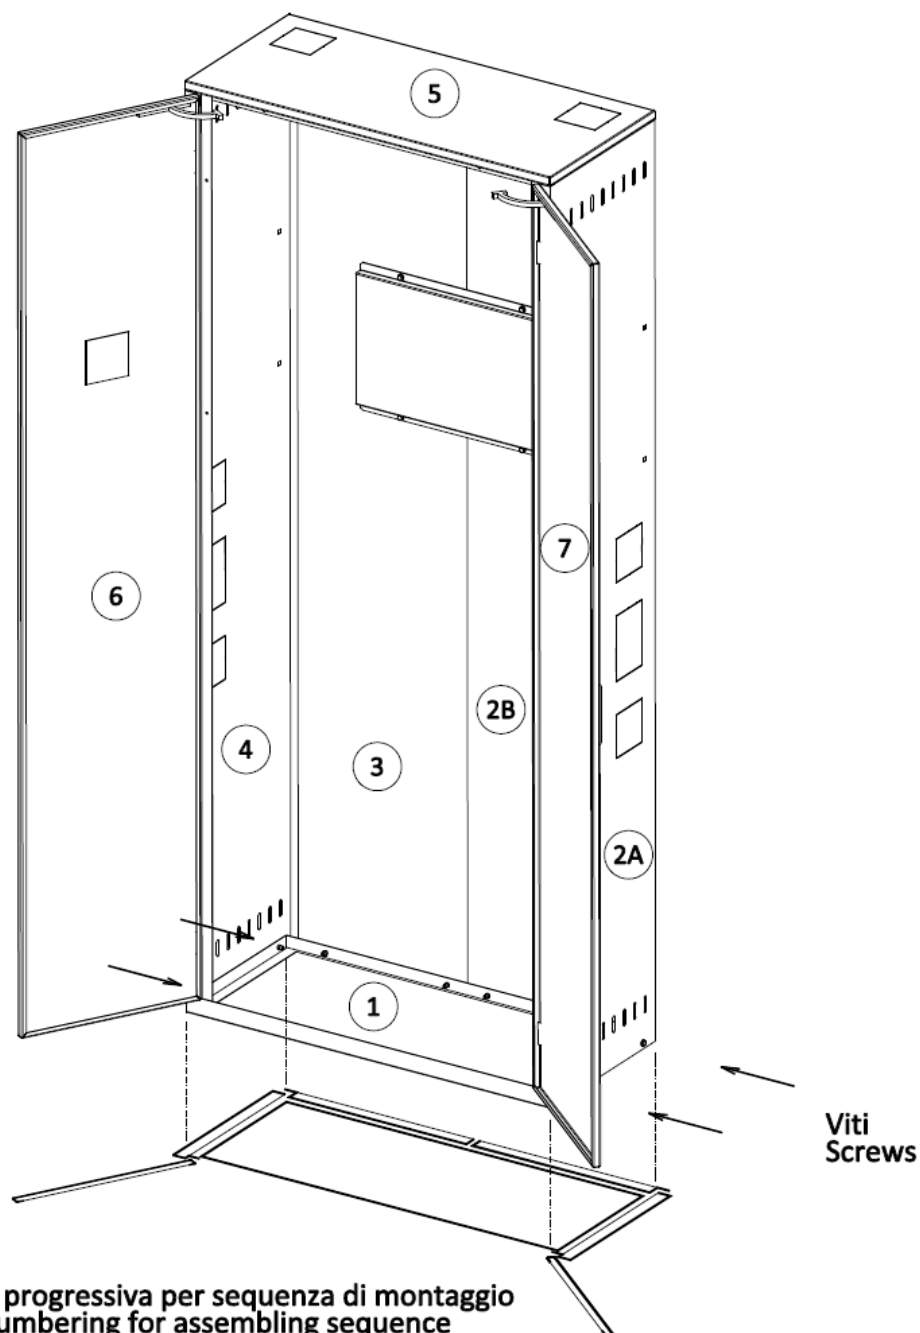

WARNINGS AND PRECAUTIONS



Connect the cabinet to the grounding conductor and the individual parts between them with the appropriate conductors supplied.

All electrical connections must be carried out and are the responsibility of the installer

The degree of protection of the cabinet is IP 2X. The degree of protection IP 2XD can be reached with an appropriate installation of electrical equipment inside.

Bound to the installation of electrical devices required by the Norm (lamp, power point, etc...), the cabinet is compliant with the elevator's normative EN81-2:2010

Maximum load on the interior eyebolt: Kg 150 (330lbs)

Subject to change without notice!

Address and contact details

FCM Carpenterie Metalliche
Via G.Pastore, 19
25040 Nigoline di Corte Franca (BS)
Mail: commerciale@fcmcarpenterie.com
Tel.(039) 030.984367 Fax(039) 030.9826920
internet: <http://www.fcmcarpenterie.com>

Subject to change without notice!