



INSTRUCTIONS TO REPLACE THE PRESSURE SWITCH

Procedure

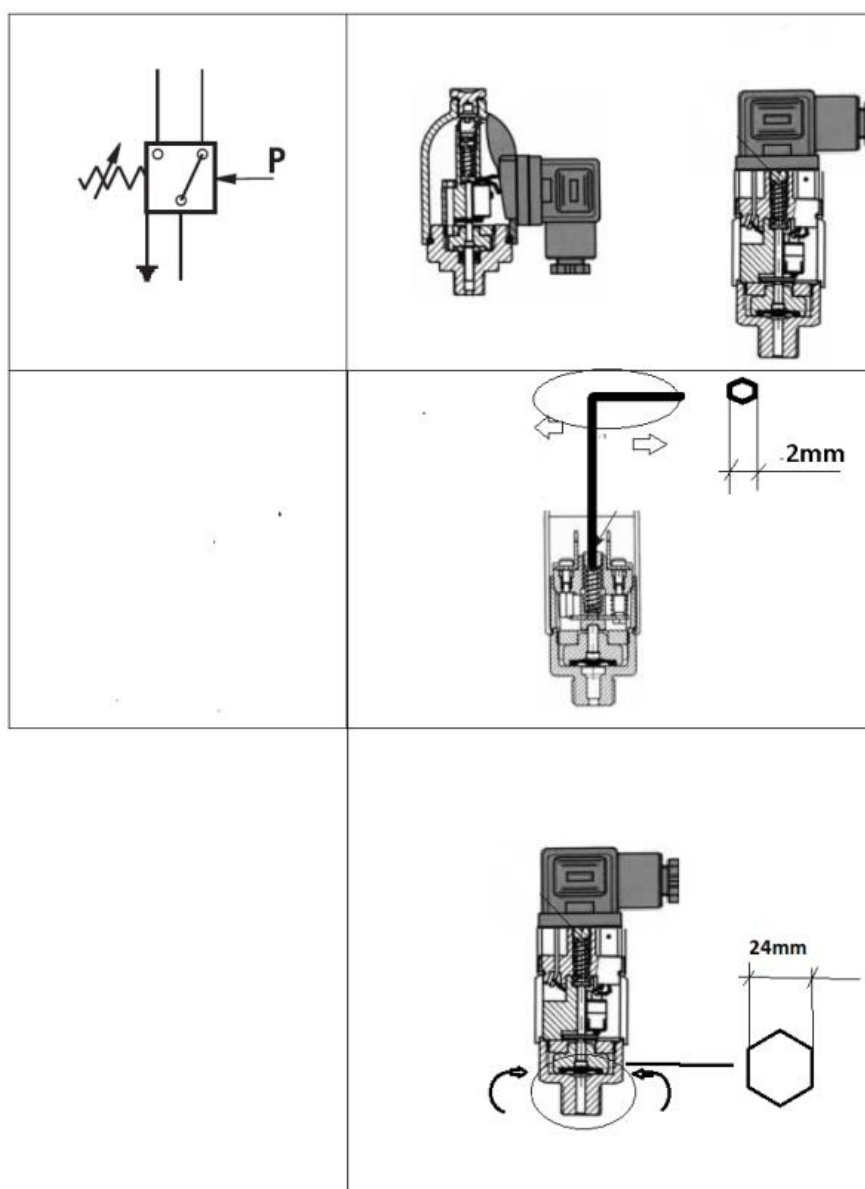



- Turn off the tap line



(Open tap)



(close tap)

- Press the emergency button and make sure the pressure indicated is 0 bar



- Remove the screw of the electrical connector and remove it



- Remove the pressure switch with 24mm wrench



- Remove the pressure switch, store sealing washer



- Take the new pressure switch, remove protection and replace the pressure switch with the washer



- Screw the pressure switch and tighten



- Register the the new pressure switch using D 2mm hex wrench



- Replace the electrical connector, tighten the screw and open the tap

